

VOLL®



MANUAL

SPN-16.8-Thin

Ultra-thin Solar Panel Plus Thin

SPN-16.8-Thin



AUTONOMOUS



NO MAINTENANCE



ULTRA-THIN

MANUAL SPN-16.8-THIN

VOLL® SOLAR PANEL PLUS THIN

1. INTRODUCTORY INFORMATION

1.1 GENERAL DESCRIPTION

The VOLL® Solar System 16.8 consists of a solar panel (SPN-16.8-Thin) and a battery (B-16.8-NMH). The solar panel can be used with a wide range of 16.8 V solar motors. The sunlight captured by the panel is converted into electrical energy and can be stored in the battery, allowing the solar motor to operate autonomously.

1.2 SCOPE AND INTENDED USE

The solar panel captures sunlight and converts it into electrical energy to charge the external battery. The panel can also be used with the original external battery of the solar motor. No modifications to the system are permitted. Use caution.

1.3 LIABILITY

- Read this manual carefully before installing and using this product.
- The solar panel must be installed by a professional installer of drive and automation systems in accordance with VOLL® instructions and the regulations in force in the country of use.
- Any use of this product outside the scope described above is prohibited. Failure to comply with the instructions in this manual voids VOLL®'s liability and warranty.
- The installer must inform the customer about the conditions for use and maintenance of this product and, after installation, hand over the operating and maintenance instructions. Service work may only be carried out by an authorised installer.
- VOLL® strives to continuously improve all products; therefore specifications, applications and technologies mentioned in this sheet may be changed at any time. The information provided in this document is based on the knowledge available at the time of publication. No rights can be derived from the information, diagrams or illustrations in this manual.

If in doubt about installation or for additional information, contact a VOLL® dealer or visit voll-energie.nl.

2. SAFETY INSTRUCTIONS

- Use only for the scope and purpose described in section 1.2.
- Keep out of reach of children.
- Connect the solar panel only according to the wiring diagram provided.
- Recycle the solar panel only by the method described.
- Do not place objects on the solar panel.
- Do not drop the panel, strike it, pierce it or immerse it in water.

3. INSTALLATION

3.1 CONNECTION REQUIREMENTS


- The professional installer of drive and automation systems who installs the solar panel must strictly follow the guidelines below.
- The solar panel is intended for outdoor use only. It must not be installed behind a window or other glass.
- The panel must always be placed in direct sunlight. Installation in shade must be avoided at all times, as this significantly reduces its performance.
- Ideally, the panel should be installed as close as possible to the motor and battery.
- Avoid loose cables as much as possible.
- Make sure the connections of the solar panel and the battery to the motor are secure.

No modifications may be made to the panel's connector after delivery from VOLL®.

3.2 MOUNTING

The solar panel is mounted using a self-adhesive strip on the clean, flat surface of the awning housing or cover.


The panel must always be placed in direct sunlight as shown in the instructions below.

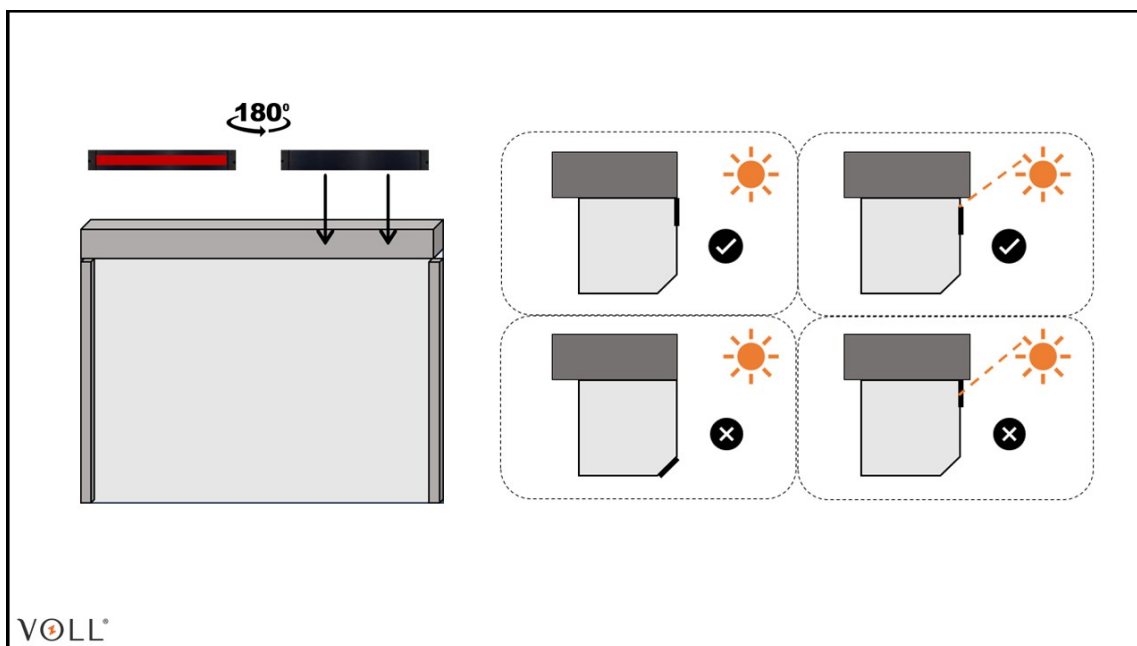

3.3 WIRING DIAGRAM

The solar panel can be connected in two ways:

1. The solar panel is connected via A to B on the solar motor. The external battery (B-16.8-NMH) is connected with its own cable to the second connection of the solar motor.
2. The solar panel is connected via A to B on the solar motor. The original external battery of the solar motor is connected to the second connection of the solar motor.

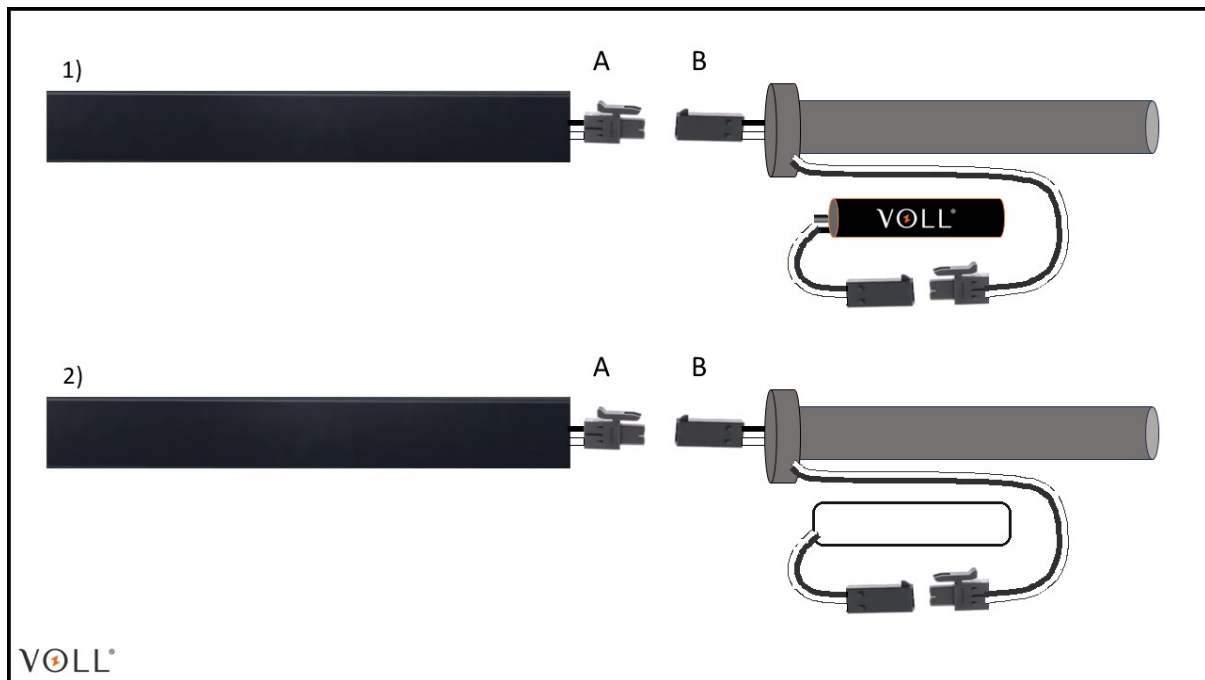

A = Molex M; B = Molex F.

4. MAINTENANCE, STORAGE AND RECYCLING

4.1 MAINTENANCE

A solar motor operates fully autonomously and therefore requires no maintenance, provided the panel is installed in direct sunlight.

Keep the panel free of snow and ensure it is not covered.

Keep the panel surface clean by regularly washing it with clean water and a soft cloth to avoid scratches.

If, after charging, the solar motor still does not operate properly, the battery may need to be replaced or the panel installation adjusted.

If in doubt about installation or for additional information, contact a VOLL® dealer or visit voll-energie.nl.

4.2 STORAGE

Ensure the panel is disconnected from the motor and battery during long-term storage.

4.3 RECYCLING



The panel must not be disposed of with household waste. The consumer and/or installer is legally obliged to recycle it via a local collection point.

Separating and recycling the panel helps to protect our environment.

5. TECHNICAL DATA

5.1 DATASHEET

SPN-16.8-Thin	
Max. power (STC)	6.6 W
Voltage (UOC/UMPP)	29.2/22 V
Output current (ISC/IMPP)	370/310 mA
Protection class	IP44 (photovoltaic cells: IP67)
Dimensions (L×W×H)	600x60x2 mm
Weight	180 g
Operating temperature	-20 °C to +70 °C

5.2 CERTIFICATION



VOLL B.V. hereby declares that this product meets the essential requirements and other relevant provisions of the applicable European Union directives, in particular the Electromagnetic Compatibility Directive 2014/30/EU and the Restriction of Hazardous Substances Directive 2011/65/EU. The full EU declaration of conformity is available on request from a VOLL® dealer or at voll-energie.nl.

Ir. Jim Hazelberg, Director, 09/2026